


CERATHERM T50

Shower system with exposed thermostatic mixer and wrap over shelf

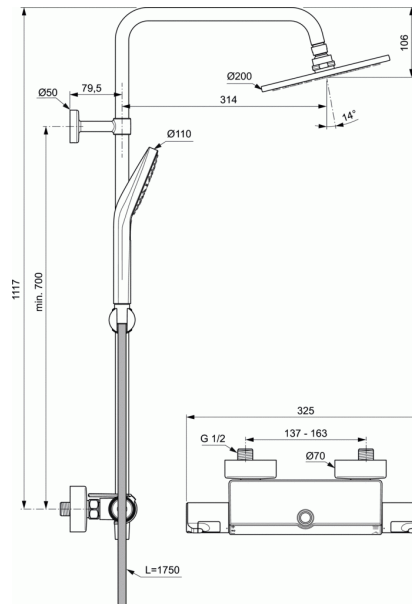

Shower system with exposed thermostatic mixer and wrap over shelf

- Ceratherm T50 exposed shower thermostatic mixer
 - Standard S-connectors
 - IS Thermostatic cartridge new technology
 - Ceramic valve G1/2 180°
 - Cool body technology
 - Fin Metal handles with hot water at 40°C stop button and 50% water volume stop button
 - Non return valve
 - Plastic wrap over shelf accessory - Chrome plated
 - Metal shower head Ø200 mm with 12 l/min water flow limiter
 - 110 mm 3F Idealrain Evo Round hand shower with 8 l/min water flow limiter
 - Vertically adjustable wall bracket for fixation to the wall
 - 1750 mm Idealflex shower hose
- Comply with EN 1111

Optional equipment: □

- Riser rail extension 150 mm A861379AA
- Riser rail extension 300 mm A861380AA

FINISHES*



AA

* AA = Chrome